

PRESENTED BY



**AN ISO/IEC 17025:2017  
ACCREDITED CALIBRATION COMPANY**

DALLAS    FT WORTH    AUSTIN    HOUSTON

[NICOLSCALES.COM](http://NICOLSCALES.COM)

---

800.225.8181

[CONTACT US](#)

NICOL SCALES & MEASUREMENT IS AN ISO ACCREDITED CALIBRATION COMPANY THAT HAS PROVIDED CALIBRATION, REPAIR AND SALES OF ALL TYPES OF WEIGHING AND MEASUREMENT PRODUCTS SINCE 1931.

# External Transducers for the DFS3

AFM-External Force Loadcell

AQM-External Torque Transducer



# AFM and AQM External Sensors

## Versatility and Simplification

The external sensors: **AFM** external load cell, and the **AQM** external torque transducer, can be used together with our force gauge **DFS3** to offer ultimate flexibility when performing different types of tests in various applications without having to constantly change settings. All settings can be preconfigured so that the sensors are ready for use, and this especially increases the efficiency when doing repeated testing day-after-day.

Up to two external sensors can be connected in the **DFS3** force gauges. Together with the internal sensor, the full set-up provides a 3-in-1 device. The force gauge shows the results from one sensor at a time, so that there is no doubt as to which sensor the results come from.

It is easy to connect the two external sensors - they both have an ADC inline box, which ensures a stable digital signal and enables the force gauge itself to identify them with a single click. The digital communication offers an improved accuracy and keeps the calibration information stored within the external device, meaning it can be used by other **DFS3** gauges without affecting readings. This makes it plug-and-play.



### External loadcells **AFM**

Capacities from 0.5lbf to 1000lbf (2.5N to 5000N)  
Accuracy: 0.1% FS



### External Torque Transducers **AQM**

Capacities from 3in-lbf to 200in-lbf (0.35 Nm to 20 Nm)  
Accuracy: 0.3% FS

\* Sensors presented with a **DFS3-025**

# AFM & AQM with the DFS3


## Unique User Interface

The **AFM** and **AQM** sensors are automatically recognized by the **DFS3** force gauge. The integrated electronics associated with the sensors contain all the calibration parameters necessary to guarantee the best measurement precision and metrological monitoring. In addition, potential overloads, dates, and values are also stored in memory and displayed.

| Information : AUX1    |                    |
|-----------------------|--------------------|
| AUX 1                 |                    |
| Overloads             |                    |
| Numbers of Overloads  | 2                  |
| Time ( Last Overload) | 01 Oct 2022, 11:56 |
| Load (Last Overload)  | 78.2N              |
| Overloads             |                    |
| Numbers of Overloads  | 2                  |
| Time ( Last Overload) | 01 Oct 2022, 11:56 |
| Load (Last Overload)  | 78.2N              |
| Calibration           |                    |
| Calibration Date      | 12 Sep 2022        |
| Calibration Due On    | 12 Sep 2023        |
| Zero Offset           | 0 %                |
| 07 Oct 2022, 09:12    |                    |

## Always up to speed

With the **DFS3** you are always sure to have the latest firmware on your device. Our cloud-based software AMETEK **Device Agent** helps you identify the latest firmware and get it updated in only 60 sec.

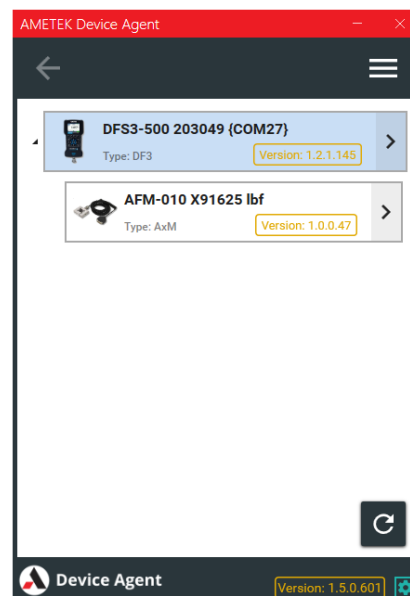

## Versatility and Flexibility

All the **DFS3s** have an internal Loadcell and TWO external transducer inputs. A Test Station could be configured and set up with 3 transducers.

The **DFS3** manages and interfaces with one sensor at a time.

With FIVE Test Setups available, you can pre-configure your tests with the required transducer. This simplifies and improves the quality and reliability of your measurements.

Fast and intuitive!



# AFM with the motorized TCM

## Get greater flexibility in application solutions


To benefit from a more stable and reliable test speed, the external **AFM** loadcells can be combined with a **TCM** Motorized Test Stand. This helps to eliminate any variables that might impact the force readings and offers an ideal solution for force measurement testing. The **TCM** series is well adapted for production environments and attached with the **DFS3** digital force gauges makes tensile, compression, peel, and flexural testing of your samples an easy task.

In this solution, you get a powerful stand-alone solution for product testing, where the **DFS3** force gauge can display the **TCM** travel for easy positioning of the moving crosshead. The **TCM** will stop at break or stop at the limit set on the gauge. This solution is also ideal where repeated measurements are required. Here, the **TCM** series will ensure that the test is carried out in exactly the same way every time, thus making data collection easier and more comparable.

## Benefits with the ForceTest software

Adding the Chatillon **ForceTest** software will power up your **TCM** Series force testing solution and will turn your analysis into a fast and simple process. By combining the **DFS3** force gauge and the **ForceTest** software with the **TCM** Series you obtain:

- Unique solution with powerful and modern UI in **ForceTest** software
- Plotting of Force (**DFS3**)
- Setups for Force (Tension or Compression) Torque, Friction and Peel
- Library of results and calculations (**ForceTest**):
  - Peak (T & C)
  - Maximum; Minimum; Average for complete test or, on a specific area of research
  - Friction test setup with COF results
  - Peeling test setup with peeling resistance results
  - Selectable Break detection for either software or DF3 readings
  - Torque test setup
  - Adjustable data rate
  - Live graph with autoscaling
  - Statistics
  - Export to XLS or CSV and PDF report
- Report Designer
- Validation mode for importing known data set in CSV format. Useful in IQ/OQ installation process

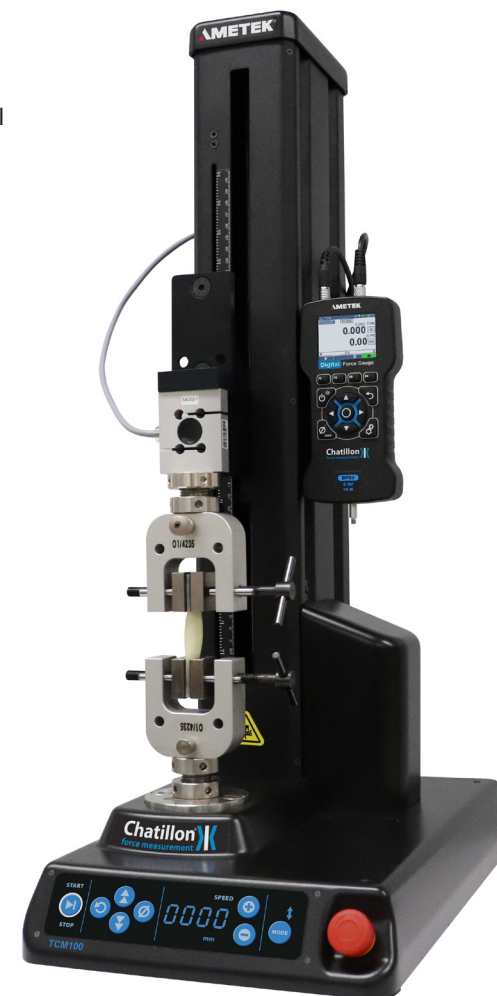

# AFM Loadcells

The Chatillon® **AFM** series Loadcells are designed to operate in both tension and compression using strain gauge technology. In combination with a **DFS3** force gauge, the **AFM** loadcells offer an ideal solution for applications that require a measurement where there is no room for the gauge or to gain further flexibility. The gauge may be handheld or remotely mounted and the loadcell may be placed right where it needs to be to take the reading. A straight cable with a length of app. 9ft (2.8M) allows the **AFM** transducers to be used in diverse remote configurations.

The gauge will operate the same as if it were an integral load cell and all functions will operate normally

Accuracy better than 0.1% of full scale is now possible for all detachable **AFM** Loadcells. All **AFM** Loadcells are calibrated in tensile and compression with a measurement readout and tabulated on the NIST calibration certificate.




Loadcell **AFM-025**, 25lbf (100N)



Loadcell **AFM-200**, 200lbf (1000N)

**Note:** ideally when measuring Force, the Loadcell should be placed so that the force always passes through its center while minimizing lateral forces.

**Important:** The requirements to accomplish this are for the load applied centrally while keeping the best possible rigid bearing surface.





# AFM Loadcells

## Model & Capacity

| Model     |            | Lbf      | N       | kgf     | gf      | Ozf     | Strain |
|-----------|------------|----------|---------|---------|---------|---------|--------|
| AFM-0250G | Capacity   | 0.500000 | 2,5000  | 0.25000 | 250,00  | 8,0000  | 0.33   |
|           | Resolution | 0.00001  | 0.0001  | 0.0001  | 0.01    | 0.0001  |        |
| AFM-0002  | Capacity   | 2,0000   | 10,0000 | 1,00000 | 1000,00 | 32,000  | 0.33   |
|           | Resolution | 0.0001   | 0.0001  | 0.00001 | 0.01    | 0.001   |        |
| AFM-0010  | Capacity   | 10,0000  | 50,000  | 5,0000  | 5000,0  | 160,00  | 0.33   |
|           | Resolution | 0.001    | 0.001   | 0.0001  | 0.1     | 0.01    |        |
| AFM-0025  | Capacity   | 25,000   | 100,000 | 10,0000 | 10000,0 | 400,00  | 0.38   |
|           | Resolution | 0.001    | 0.001   | 0.0001  | 0.1     | 0.01    |        |
| AFM-0050  | Capacity   | 50,000   | 250,00  | 25,000  | 25000   | 800,00  | 0.15   |
|           | Resolution | 0.001    | 0.01    | 0.001   | 1       | 0.01    |        |
| AFM-0100  | Capacity   | 100,000  | 500,00  | 50,000  | 50000   | 1600,00 | 0.20   |
|           | Resolution | 0.01     | 0.01    | 0.001   | 1       | 0.1     |        |
| AFM-0200  | Capacity   | 200,00   | 1000,00 | 100,000 | -       | -       | 0.20   |
|           | Resolution | 0.01     | 0.01    | 0.001   | -       | -       |        |
| AFM-0500  | Capacity   | 500,00   | 2500,0  | 250,00  | -       | -       | 0.20   |
|           | Resolution | 0.01     | 0.1     | 0.01    | -       | -       |        |
| AFM-1000  | Capacity   | 1000,00  | 5000,0  | 500,00  | -       | -       | 0.30   |
|           | Resolution | 0.01     | 0.1     | 0.01    | -       | -       |        |

## Calibration Certificate for AFM Loadcells

The calibration of the **AFM** Loadcells is carried out with the greatest care by our metrology experts. All our **AFMs** are delivered with a calibration certificate and a statement of Tensile and Compressive measurements.

**Chatillon**  
force measurement

**AMETEK**  
8600 Somerset Drive  
Largo, FL 33773  
(727) 536-7831

**CERTIFICATE OF CALIBRATION # WS2 37129**

CUSTOMER:  
ADDRESS:  
CITY/STATE:

**TRACEABILITY STATEMENT**  
TRACEABILITY AS DEFINED BY THIS CERTIFICATE IS TO AN AMETEK TEST AND CALIBRATION INSTRUMENTS DIVISION LABORATORY REFERENCE STANDARD, OR STANDARDS. SAID STANDARDS ARE ULTIMATELY TRACEABLE BY MEANS OF AN UNBROKEN CHAIN OF CALIBRATIONS TO THE INTERNATIONAL SYSTEM OF UNITS (SI) (SYSTEME INTERNATIONAL D'UNITES) THROUGH AN ACCREDITED NATIONAL METROLOGY INSTITUTE (SUCH AS NIST, PTB/DKD, BNM, LNE, KGM, DTL, CENAM, ETC), OR BY REFERENCE TO A NATURAL PHYSICAL CONSTANT ACCEPTED BY CGPM AND CIPM. AMETEK CALIBRATION NORMS ARE IN ACCORDANCE WITH THE BASIC REQUIREMENTS OF ISO 10012 AND ANSI Z540-1.


MODEL: DF83-050 SERIAL NUMBER: 117506  
CALIBRATION PROCEDURE: MGPP-178 DATE CERTIFIED: 1/14/2022

**PRODUCT SPECIFICATION**  
CAPACITY: 50 LBF X 0.001 LBF ACCURACY LIMITS: +/-0.10% OF FULL SCALE  
CONDITION: New PAGE 1 OF 2

# AFM Loadcells

## Model and Characteristics

|                                                       |                                                                                  |
|-------------------------------------------------------|----------------------------------------------------------------------------------|
| Accuracy:                                             | ±0.1% of Full Scale                                                              |
| Tare Capacity:                                        | 110% of Rated Capacity                                                           |
| Maximum Overload:                                     | 150% of Rated Capacity                                                           |
| Resolution:                                           | Up to 100,000 points of resolution<br>(Adjustable depending on Capacity & Units) |
| Peak:                                                 | 1 kHz                                                                            |
| Sampling:                                             | 4 kHz                                                                            |
| Connection thread size (up to 25lbf, 100N):           | Male - #10-32                                                                    |
| Connection thread size (50 to 200lbf, 250 to 1000 N): | Female - 1/4 -28 UNF                                                             |
| Connection thread size (500lbf, 2500 N):              | Female - 1/2-20 UNF                                                              |
| Operating Temperature:                                | 40°F to 110°F (5°C to 45°C)                                                      |
| Instrument Weight:                                    | 1.1 lbs (0.5 kg)                                                                 |
| Shipping Weight:                                      | 4 lbs (2 kg)                                                                     |
| Warranty:                                             | 2 Years                                                                          |

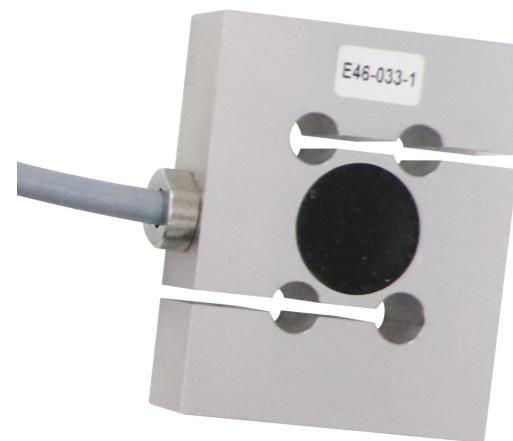

## Accessories (Included with AFM Loadcells)

AFM-250G

AFM-0010

SPK-FMG-12A... Hook

AFM-0002

AFM-0025

SPK-FMG-11A... Flat Adapter

AFM-0050

SPK-FMG-12C... Hook

AFM-0100

SPK-FMG-11B... Flat Adapter

AFM-0200

SPK-DFS-R-139. Thread Adapter 1/4-28M to 5/16-18M

AFM-0500

SPK-FMG-12C... Hook

AFM-1000

SPK-FMG-11B... Flat Adapter


13048 ..... Thread Adapter 1/4-28F to 5/16-18F

17162 ..... Thread Adapter 5/16-18M to 1/2-20M




# AFM Loadcells

## Dimensions

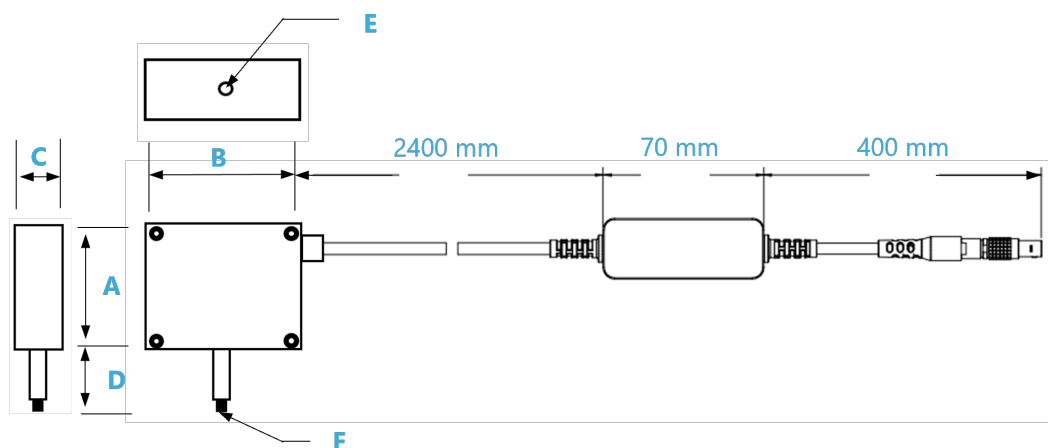

| Model            | A<br>in /<br>mm | B<br>in /<br>mm | C<br>in /<br>mm | D<br>in /<br>mm | E        | F        |
|------------------|-----------------|-----------------|-----------------|-----------------|----------|----------|
| <b>AFM-0250G</b> | 1.5<br>38.10    | 2<br>50.80      | 0.75<br>19.05   | 0.75<br>19.05   | #10-32 F | #10-32 M |
| <b>AFM-002</b>   | 1.5<br>38.10    | 2<br>50.80      | 0.75<br>19.05   | 0.75<br>19.05   | #10-32 F | #10-32 M |
| <b>AFM-010</b>   | 1.5<br>38.10    | 2<br>50.80      | 0.75<br>19.05   | 0.75<br>19.05   | #10-32 F | #10-32 M |
| <b>AFM-025</b>   | 1.5<br>38.10    | 2<br>50.80      | 0.75<br>19.05   | 0.75<br>19.05   | #10-32 F | #10-32 M |

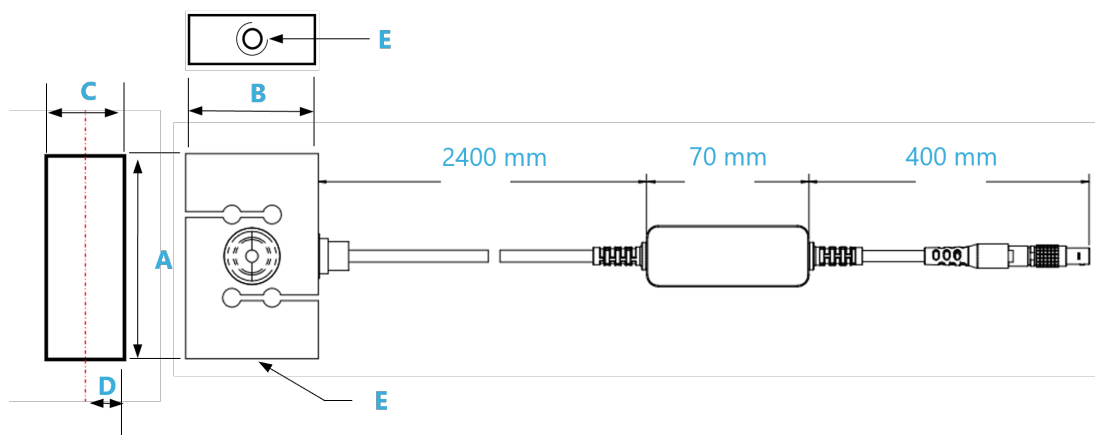

| Model           | A<br>in /<br>mm | B<br>in /<br>mm | C<br>in /<br>mm | D<br>in /<br>mm | E          |
|-----------------|-----------------|-----------------|-----------------|-----------------|------------|
| <b>AFM-050</b>  | 2.5<br>63.10    | 2<br>50.80      | 0.60<br>15.50   | 0.30<br>7.88    | 1/4 - 28 F |
| <b>AFM-100</b>  | 2.5<br>63.10    | 2<br>50.80      | 0.60<br>15.50   | 0.30<br>7.88    | 1/4 - 28 F |
| <b>AFM-200</b>  | 2.5<br>63.10    | 2<br>50.80      | 0.60<br>15.50   | 0.30<br>7.88    | 1/4 - 28 F |
| <b>AFM-500</b>  | 2.5<br>63.10    | 2<br>50.80      | 0.98<br>15.50   | 0.49<br>12.45   | 1/2 - 20 F |
| <b>AFM-1000</b> | 2.5<br>63.10    | 2<br>50.80      | 0.98<br>15.50   | 0.49<br>12.45   | 1/2 - 20 F |

# Torque Transducers AQM

When combined with the **DFS3**, these rugged and accurate sensors turn your force gauge into a torque measurement device: no need to purchase another gauge. As is the case with the dedicated loadcells, the gauge may be handheld or used in diverse remote configurations with the straight cable of app. 9ft (2.8M) .


This configuration also offers the flexibility of having both a force and a torque measurement in a single gauge. This is the unit to select for maximum flexibility: one unit and interchangeable sensors can do it all. The gauge will operate the same as if it were an integral loadcell and all functions will operate normally.

The Chatillon® **AQM** series Torque Transducers are designed to operate in both clockwise and counterclockwise directions using strain gauge technology and an accuracy better than 0.3% of full scale is now possible for all detachable **AQM** Torque Transducers. All **AQM** Torque Transducers are calibrated in both clockwise and counterclockwise directions tabulated on the NIST calibration certificate.



**Note:** Ideally when measuring Torque, the Torque Transducer should be placed so that the torque loads always passes through its center while minimizing lateral forces.

**Important:** The requirements to accomplish this are for the Torque to be applied centrally while keeping the best possible rigid retaining surface.

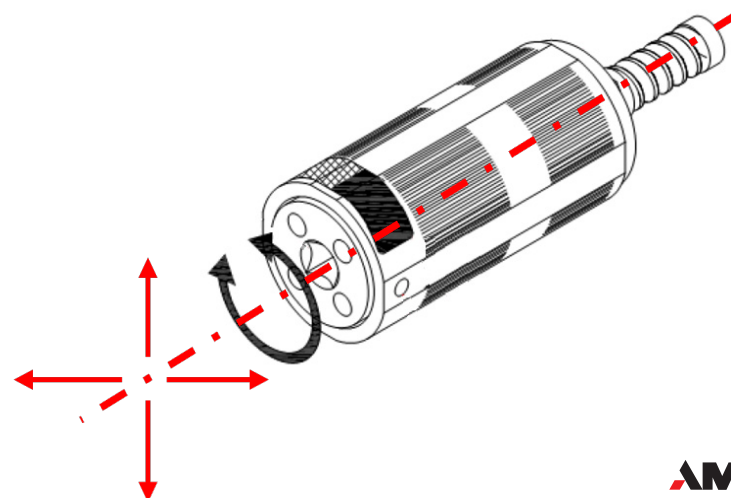

# Torque Transducers AQM

## Model & Capacity

| Model   |            | Lbf.in  | N.cm    | kg.cm   | g.cm   | N.m     | Oz.in  | Torsion |
|---------|------------|---------|---------|---------|--------|---------|--------|---------|
| AQM-003 | Capacity   | 3,0000  | 35,000  | 3,5000  | 3500,0 | 0,35000 | 50,000 | 3°      |
|         | Resolution | 0,0001  | 0,001   | 0,0001  | 0,1    | 0,00001 | 0,001  | 3°      |
| AQM-012 | Capacity   | 12,0000 | 125,000 | 12,5    | 12500  | 1,25000 | 192,00 | 3°      |
|         | Resolution | 0,0001  | 0,001   | 0,0001  | 0,1    | 0,00001 | 0,01   | 3°      |
| AQM-050 | Capacity   | 50,000  | 500,00  | 50,000  | 50000  | 5,0000  | 800,00 | 3°      |
|         | Resolution | 0,001   | 0,01    | 0,001   | 1      | 0,0001  | 0,01   | 3°      |
| AQM-100 | Capacity   | 100,000 | 1000,00 | 100,000 | 100000 | 10,0000 | 1600,0 | 3°      |
|         | Resolution | 0,001   | 0,01    | 0,001   | 1      | 0,0001  | 0,1    | 3°      |
| AQM-200 | Capacity   | 200,00  | 2000,0  | 200,00  | 200000 | 20,000  | 3200,0 | 3°      |
|         | Resolution | 0,01    | 0,1     | 0,01    | 10     | 0,001   | 0,1    | 3°      |

**AQM** torque transducers are supplied with a gripping chuck.

The chuck is inserted into the **AQM** via a 9.5mm square tip, which is removable and lockable.

This chuck can therefore be replaced by other gripping mechanisms for different product types such as corks or bottle caps.

## Calibration Certificate for AQM Torque Transducers

The calibration of the **AQM** Torque Transducer is carried out with the greatest care by our metrology experts. All our **AQMs** are delivered with a calibration certificate and a statement of Clockwise and Counterclockwise Torque measurements.



# Torque Transducers AQM

## Model and Characteristics

|                                                           |                                                                                  |
|-----------------------------------------------------------|----------------------------------------------------------------------------------|
| Accuracy:                                                 | ±0.3% of Full Scale                                                              |
| Tare Capacity:                                            | 10% of Rated Capacity                                                            |
| Maximum Overload:                                         | 150% of Rated Capacity                                                           |
| Resolution:                                               | Up to 100,000 points of resolution<br>(adjustable depending on Capacity & Units) |
| Peak:                                                     | 1 kHz                                                                            |
| Sampling:                                                 | 4 kHz                                                                            |
| Display:                                                  | 10 Hz                                                                            |
| Socket Adapter:                                           | 3/8" (9.5mm) Square Female                                                       |
| Mandrel Max Opening ( <b>AQM-003</b> ):                   | 0.06 to 0.40" (1.6 to 10mm)                                                      |
| Mandrel Max Opening ( <b>AQM-012</b> to <b>AQM-200</b> ): | 0.08 to 1.20" (2 to 30mm)                                                        |
| Operating Temperature:                                    | 40°F to 110°F (5°C to 45°C)                                                      |
| Instrument Weight:                                        | 1.1 lbs (0.5 kg)                                                                 |
| Shipping Weight:                                          | 4 lbs (2 kg)                                                                     |
| Warranty:                                                 | 2 Years                                                                          |



## Accessories (Included with **AFM** Loadcells)


**AQM-003 ; AQM-012**  
Socket Bit & Jacobs tightening key

**AQM-050 ; AQM-100**  
Socket Bit & Jacobs tightening key


**SPK-DTG-037..** 1/4" (6.35mm) square to Hex

**SPK-DTG-039..** 1/2" (12.70mm) square to Hex

# Torque Transducers AQM

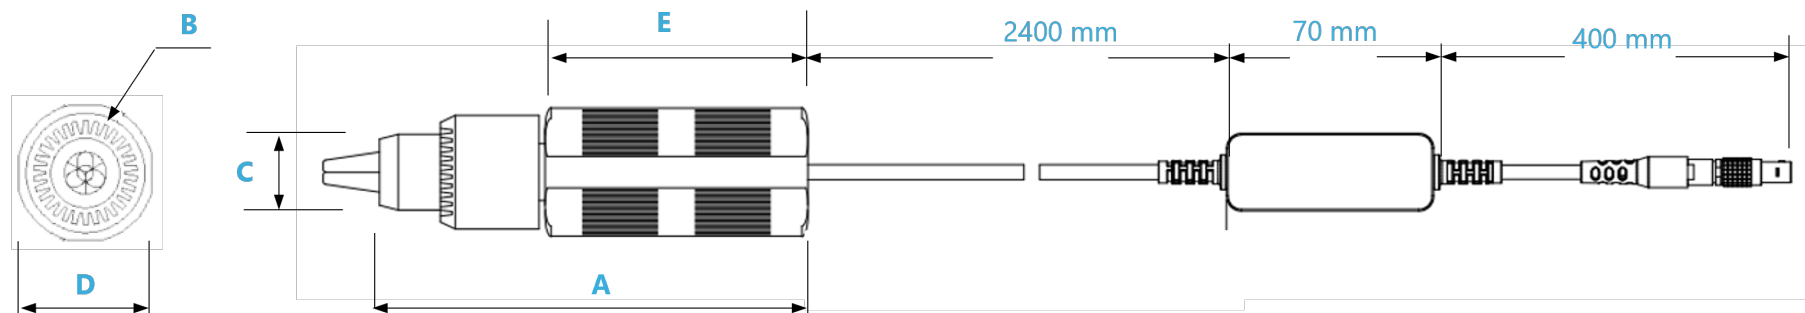

| Model          | A<br>in /<br>mm | B<br>in /<br>mm | C<br>in /<br>mm | D<br>in /<br>mm | E<br>in /<br>mm | Mandrel<br>Opening<br>in /<br>mm |
|----------------|-----------------|-----------------|-----------------|-----------------|-----------------|----------------------------------|
| <b>AQM-003</b> | 5.62<br>142.74  | 1.25<br>31.80   | 1.00<br>25.40   | 1.70<br>42.90   | 3.67<br>93.30   | 0.06 to 0.63                     |
| <b>AQM-012</b> | 6.00<br>152.40  | 1.62<br>41.10   | 1.20<br>30.50   | 1.70<br>42.90   | 3.67<br>93.30   | 0.08 to 0.51<br>2 to 13          |
| <b>AQM-050</b> | 6.00<br>152.40  | 1.62<br>41.10   | 1.20<br>30.50   | 1.70<br>42.90   | 3.67<br>93.30   | 0.08 to 0.51<br>2 to 13          |
| <b>AQM-100</b> | 6.00<br>152.40  | 1.62<br>41.10   | 1.20<br>30.50   | 1.70<br>42.90   | 3.67<br>93.30   | 0.08 to 0.51<br>2 to 13          |
| <b>AQM-200</b> | 6.00<br>152.40  | 1.62<br>41.10   | 1.20<br>30.50   | 1.70<br>42.90   | 3.67<br>93.30   | 0.08 to 0.51<br>2 to 13          |

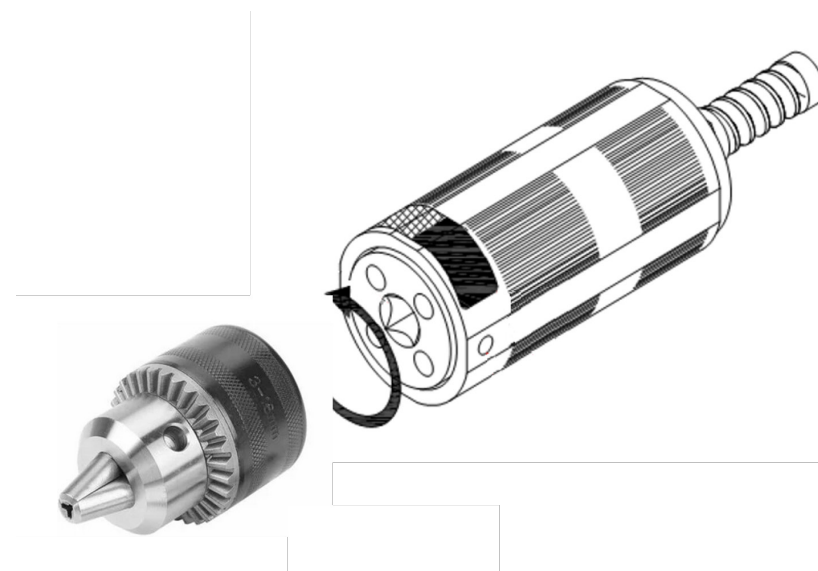

The Mandrel is detachable to allow custom adapters and fixtures to be mounted.

# Ordering the AFM with the TCM

## AFM Loadcells mounted onto motorized single column TCM

**AFM** Force transducers can be mounted onto the motorized **TCM** cross-head. It is necessary to use a **DFS3** to manage and display the force values of the **AFM** and also read the displacement position of the **TCM** on the **DFS3**. An **AFM** transducer mounting kit **SPK-TCM-004** for the **TCM** is available. Also, as shown in the photo on the right, there are quick tooling attachment systems for **AFM** transducer. Depending on the capacity of the Loadcell, anchor kits are available as; SPK-TCM-001, SPK-TLC-002, SPK-TLC-003.

**SPK-TCM-001**



NC003254A...Adaptor #10-32 / 5/16  
NC003255A...Adaptor #5/16 / 5/16  
NC003237.....Locking Nut  
NC003140..... Locking Nut  
NC000612.....Aluminum Pin  
NC003236.....Eye-End 5/8" aluminum

Thread Size #10-32

Used with **AFM-010\*** to **AFM-025**.

**SPK-TLC-002**



NC003137..... Eye-End 5/8" to 1/4 – 28M  
NC003131 ..... Steel Locking Nut ( 2 )  
NC000612 ..... Steel Pin

Thread Size 1/4 - 28

Used with **AFM-050** to **AFM-200**.

**SPK-TLC-003**



NC003138..... Eye-End 5/8" to 1/2 – 20M  
NC003131 ..... Steel Locking Nut ( 2 )  
NC000612 ..... Steel Pin

Thread Size 1/2 – 20

Used with **AFM-500**.



**TCM350-B \* with DFS3-100-AFM200**

Eye-End kit SPK-TLC-002 with Vise Grips TGX240k

\* The Loadcells **AFM-250G** and **AFM-002** will not support the adapters due to their low capacities.

\* The lower 5/8" Eye-End adapter is included with the **TCM350**.



**USA, Florida**  
Tel +1 (800) 527 9999  
[test.sales@ametek.com](mailto:test.sales@ametek.com)

**India**  
Tel +91 22 2836 4750  
[test.sales@ametek.com](mailto:test.sales@ametek.com)

**Singapore**  
Tel +65 6484 2388  
[test.sales@ametek.com](mailto:test.sales@ametek.com)

**China, Shanghai**  
Tel +86 21 5886 5111  
[test.sales@ametek.com](mailto:test.sales@ametek.com)

**China, Beijing**  
Tel +86 21 8526 2111-19  
[test.sales@ametek.com](mailto:test.sales@ametek.com)

**United Kingdom**  
Tel +44 (0) 1243 833 370  
[test.sales@ametek.com](mailto:test.sales@ametek.com)

**France**  
Tel +33 (0) 30 68 89 40  
[general.lloyd-instruments@ametek.fr](mailto:general.lloyd-instruments@ametek.fr)

**Germany**  
Tel +49 (0) 2159 9136 510  
[info.mct-de@ametek.de](mailto:info.mct-de@ametek.de)

**Denmark**  
Tel +45 4816 8000  
[test.sales@ametek.com](mailto:test.sales@ametek.com)



For detailed specifications go to the Data Sheet at [ametekttest.com](http://ametekttest.com)

No part of this document may be reproduced or modified in any form or by any means, electronic or mechanical, without express written permission from AMETEK STC.

©2021 AMETEK Incorporated

**Chatillon**  
force measurement  
**AMETEK**