


PRESENTED BY

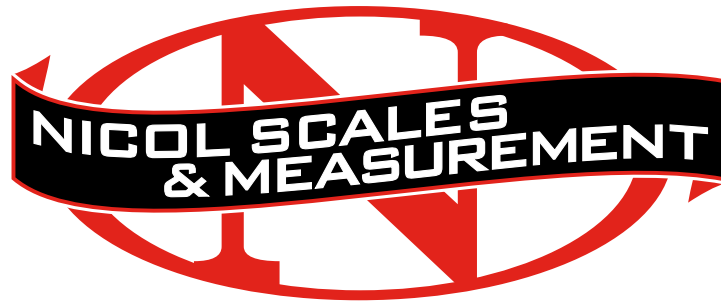

**AN ISO 17025  
ACCREDITED COMPANY**

DALLAS      FT WORTH      AUSTIN      HOUSTON


[NICOLSCALES.COM](http://NICOLSCALES.COM)

---

800.225.8181

[CONTACT US](#)

NICOL SCALES & MEASUREMENT IS AN ISO ACCREDITED CALIBRATION  
COMPANY THAT HAS PROVIDED CALIBRATION, REPAIR AND SALES OF ALL TYPES  
OF WEIGHING AND MEASUREMENT PRODUCTS SINCE 1931.

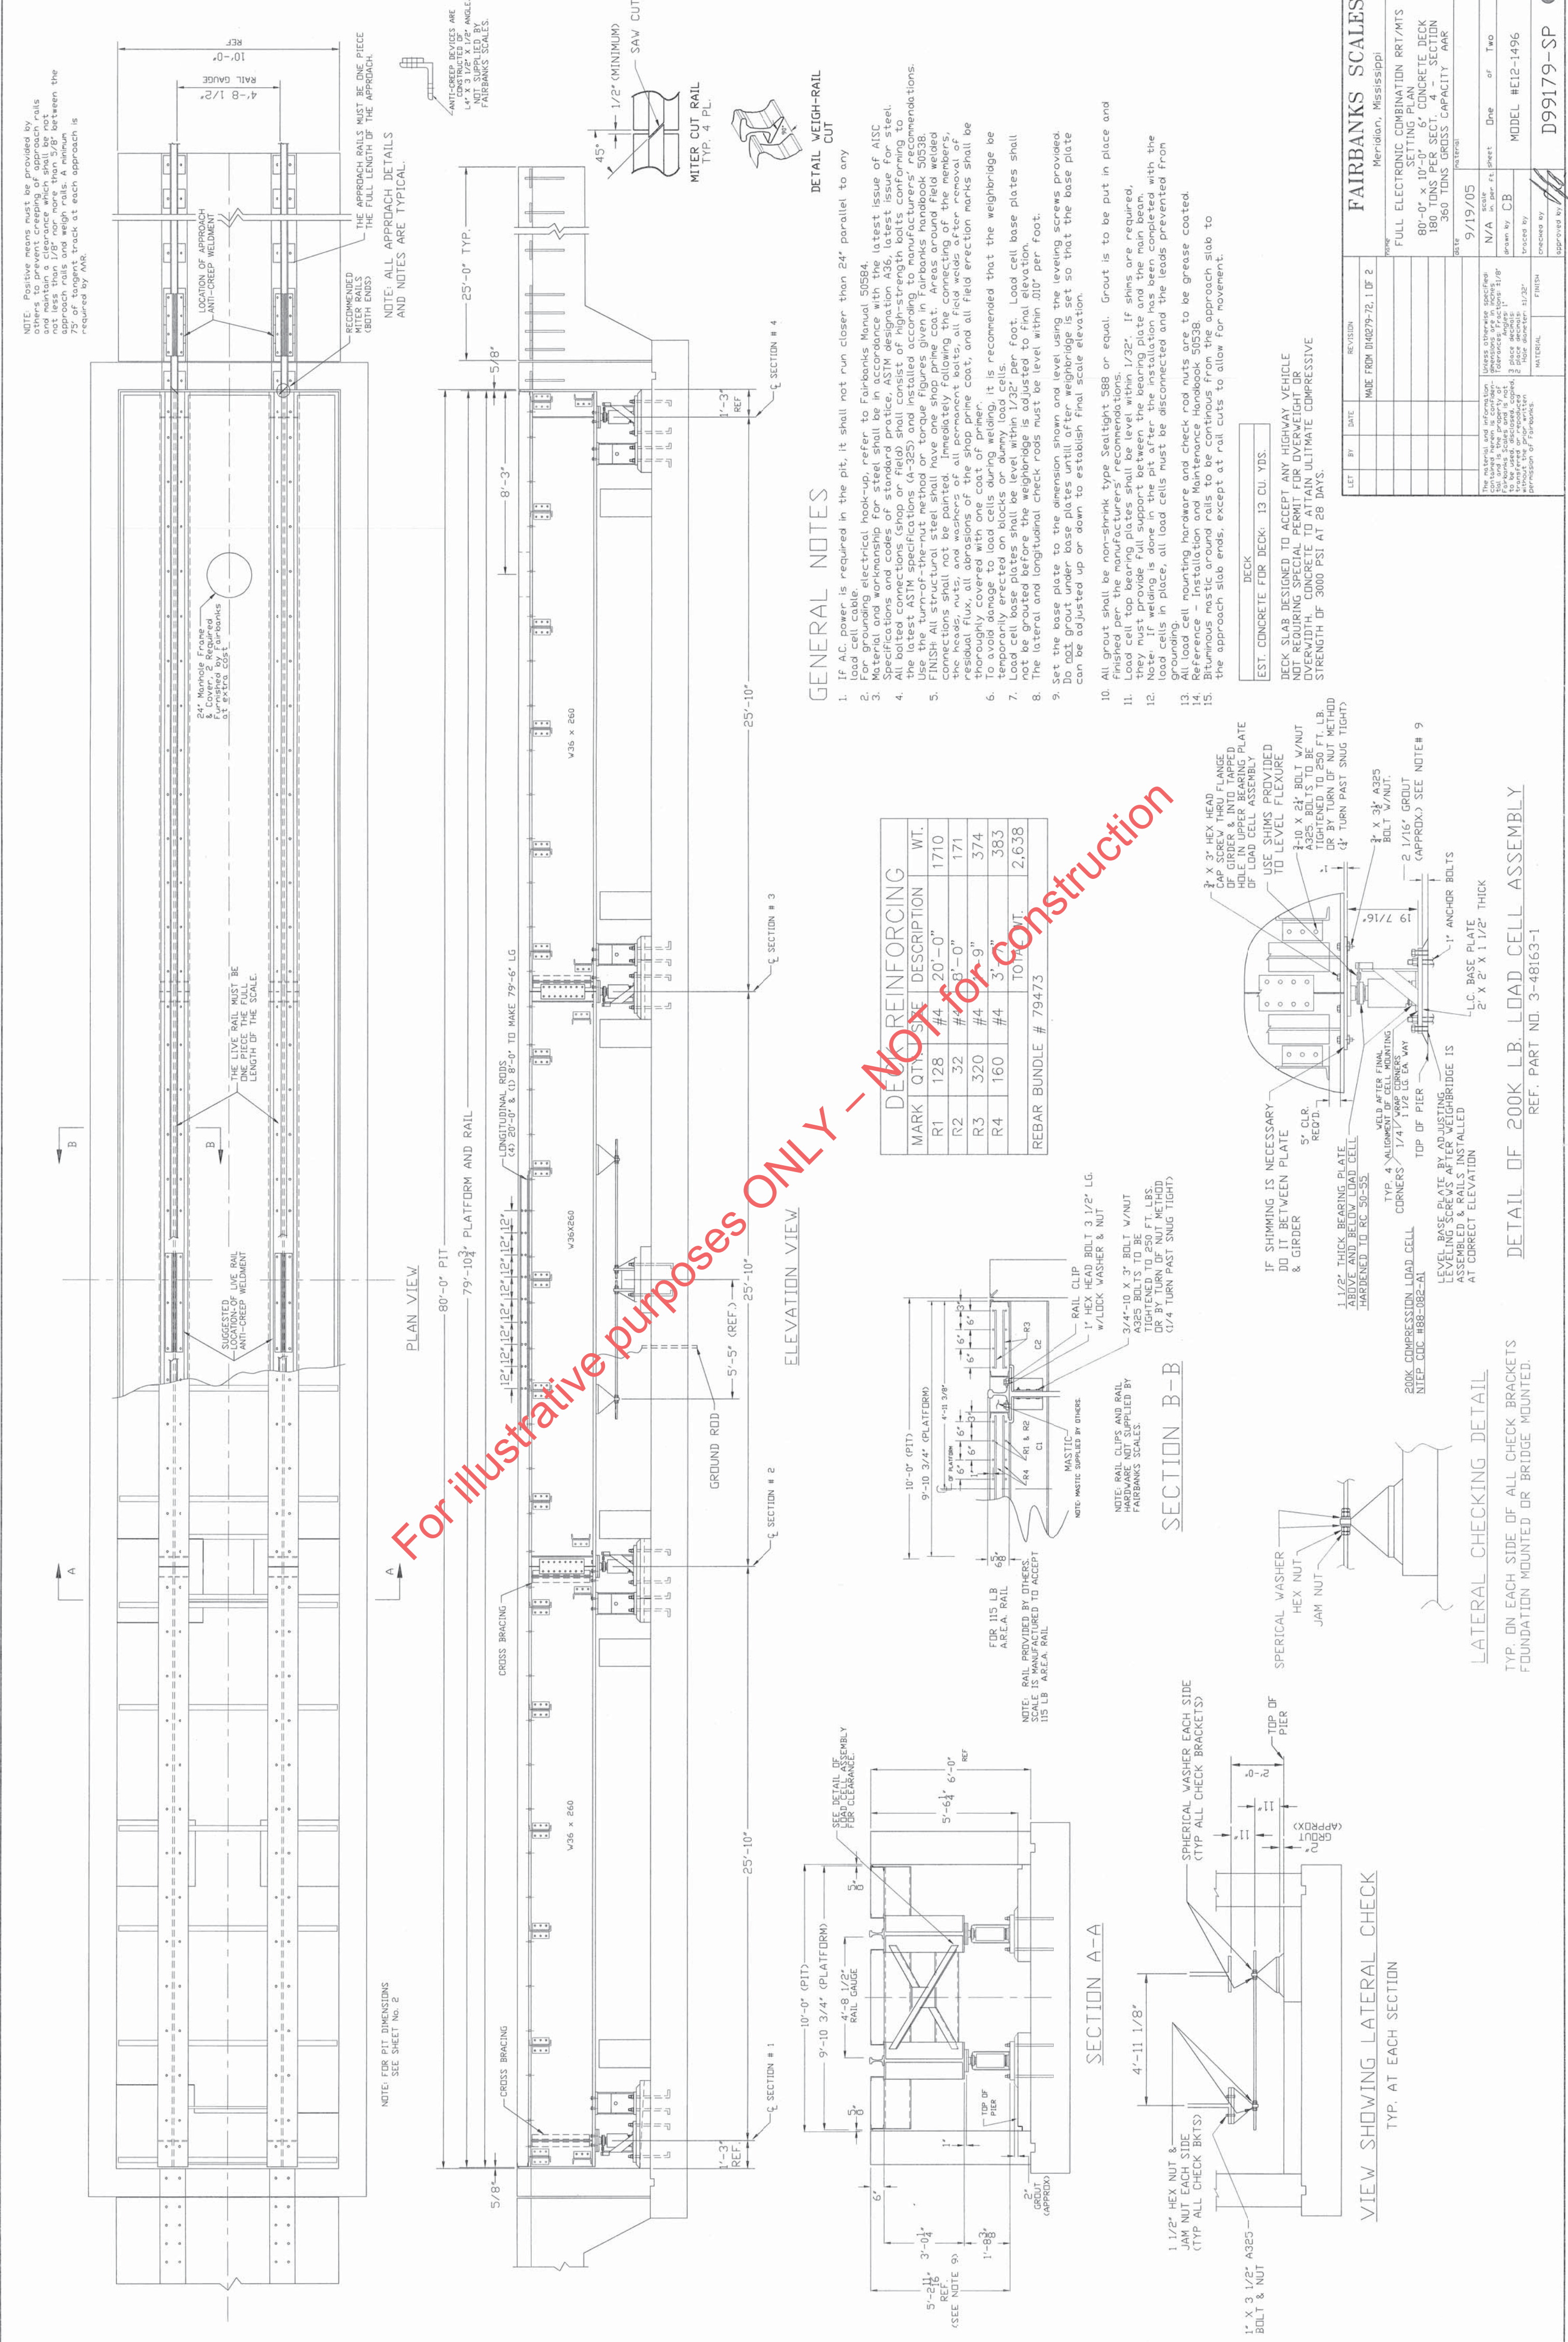

NOTE: Positive means must be provided by the contractor to ensure that the platform and rail are properly aligned and supported. The contractor shall be responsible for the proper installation and support of the platform and rail. A minimum of 2" of concrete shall be provided at each approach as required by AASHTO.


For illustrative purposes only - Not for construction

**GENERAL NOTES**

1. The load cell is required in the pit. It shall not run closer than 24" parallel to any load cell cable.
2. For grounding electrical work-up, refer to Fairbanks Manual 50284, latest issue of AISC Specifications and codes of standard practice, ASTM designation A36, latest issue for steel.
3. All steel shall be painted with a minimum of two coats of primer and one coat of paint.
4. Use the turn-of-the-nut method or torque figures given in Fairbanks handbook 50238 connections shall not be painted. Immediately following the connecting of the members, residual flux, oil abrasions of the shop prime coat, and all field erection marks shall be thoroughly covered with one coat of primer. It is recommended that the weldridge be temporarily erected on blocks or dummy load cells.
5. The load cell base plate shall be level within 1/2" per foot.
6. The lateral and longitudinal check rods must be level within 1/2" per foot.
7. All load cell mounting hardware and check rod nuts are to be grease coated.
8. Blumious mastic around walls to be continuous from the approach slab to the approach slab ends, except at rail cuts to allow for movement.
9. Set the base plate to the dimension shown and level using the leveling screws provided. The load cell base plate shall be adjusted to establish final scale elevation.
10. All steel shall be galvanized type Sattab's 588 or equal. GROUT is to be put in place and finished per the manufacturers' recommendations.
11. Load cell top bearing plates shall be level within 1/2". If shims are required, they shall be shimmed in place and level within 1/2".
12. Note: If welding is done in the pit after the installation has been completed with the groundings in place, all load cells must be disconnected and the leads prevented from grounding.
13. All load cell mounting hardware and check rod nuts are to be grease coated.
14. The approach slab shall be continuous from the approach slab to the approach slab ends, except at rail cuts to allow for movement.
15. Blumious mastic around walls to be continuous from the approach slab to the approach slab ends, except at rail cuts to allow for movement.

MARK	QTY	SIZE	DESCRIPTION	WT.
R1	128	#4	20'-0"	1710
R2	32	#4	3'-0"	171
R3	320	#4	9"	374
R4	160	#4	3'-6"	383
			TOTAL	2,638

REBAR BUNDLE # 79473

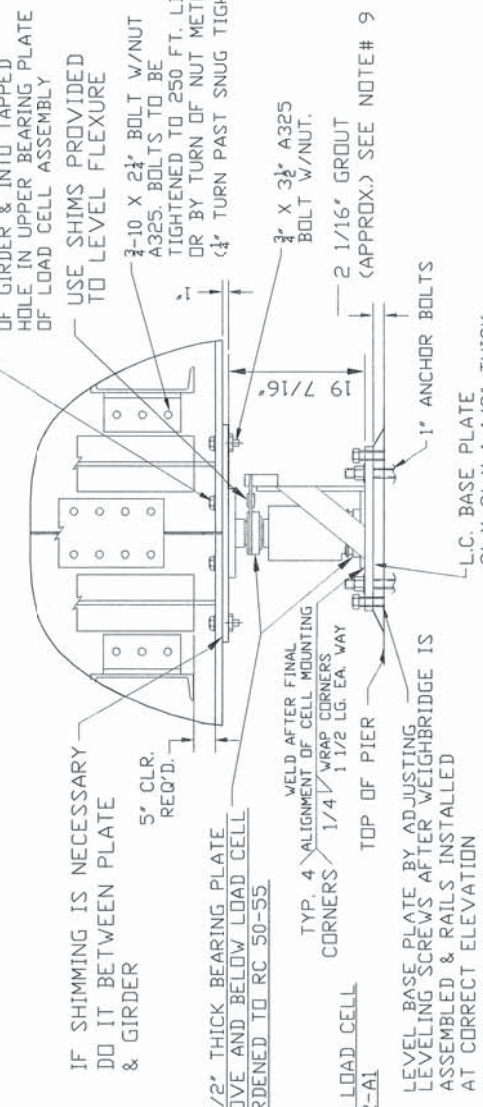

SECTION B-B  
NOTE: RAIL CLIPS AND RAIL PLATE SHALL BE INSTALLED BY THE CONTRACTOR.

SECTION A-A  
NOTE: RAIL CLIPS AND RAIL PLATE SHALL BE INSTALLED BY THE CONTRACTOR.

VIEW SHOWING LATERAL CHECK TYP. AT EACH SECTION

LATERAL CHECKING DETAIL  
TYP. ON EACH SIDE OF ALL CHECK BRACKETS FOUNDATION MOUNTED OR BRIDGE MOUNTED

**FAIRBANKS SCALES**  
Meridian, Mississippi  
FULL ELECTRONIC COMBINATION RPT/YMTS  
880' x 10' SETTING PLAN  
180 TONS PER SECT. 4 L.C. SECTION  
360 TONS GROSS CAPACITY ABE  
DATE: 9/19/05  
SCALE: N/A  
PROJECT: CB  
JOB NO: MOBILE WEIS-1996  
DESIGNED BY: [Signature]  
CHECKED BY: [Signature]  
APPROVED BY: [Signature]

D99179-SP