PRESENTED BY

NICOL SCALES & MEASUREMENT

AN ISO/IEC 17025:2017
ACCREDITED CALIBRATION COMPANY

DALLAS FT WORTH AUSTIN HOUSTON

NICOLSCALES.COM

800.225.8181

CONTACT US

NICOL SCALES & MEASUREMENT IS AN ISO ACCREDITED CALIBRATION COMPANY THAT HAS PROVIDED CALIBRATION, REPAIR AND SALES OF ALL TYPES OF WEIGHING AND MEASUREMENT PRODUCTS SINCE 1931.

ProLine Touch

Hand Pallet Jack Scale

MOBILE WEIGHING SYSTEMS

Mobile weighing provides a variety of benefits including speed, efficiency, and accuracy. The RAVAS ProLine Touch adds to that list by becoming the first weighing hand pallet truck equipped with a touch screen indicator that calculates weight in increments of 3.5 ounces. It's perfect for use in the food, pharmaceutical, and chemical industries, and parts supply chains.



Enhance Your Logistical and Production Processes

- Accurately piece counts and weighs
- Advanced scale functions for dosing
- 7.1" touch screen indicator with advanced functions
- Programmable user interface
- USB port for data capture
- 12-hours of battery life

RAVAS
creating intelligence


www.ravas.com

ProLine Touch

FUNCTIONS

- Automatic and manual zero correction
- Internal clock for date and time
- Error messages in display
- Piece counting by sampling or calculation of piece weights
- Totalling
- Entry of alphanumeric codes
- Automatic and manual tare via touch screen
- Gross/net weighing
- Weighing, Counting, Totalizing and Dosing

DIMENSIONS

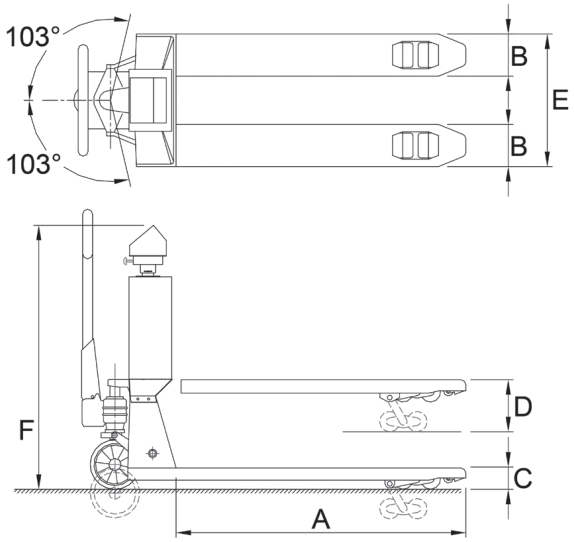

		STANDARD
A	Fork Length	48″
B	Fork Width	7.1″
C	Minimum Fork Height	3.0″
	Ground Clearancep	0.7″
D	Maximum Fork Height	7.9″
	Lifting Height	4.8″
E	Width Over Forks	27.2″
F	Height to Top Indicator	44″

STANDARD SPECIFICATIONS

CAPACITY
- 5,000 lb

GRADUATION MULTIRANGE

Multirange:

- 0 - 400 lb: graduation 0.2 lb
- 400 - 1,000 lb: graduation 0.5 lb
- 1,000 - 5,000 lb: graduation 1 lb

MAXIMUM TOLERANCE
- 0.08% of the load lifted

DISPLAY
- 7.1″, high resolution touch screen

PROTECTION CLASS
- NEMA 4 / IP65

POWER CONSUMPTION
- 360 mA

BATTERY
- 12V, by 2 exchangeable battery modules 6V-4,8Ah

BATTERY CYCLE TIME
- 15 hours, charging time 6 hours

CHARGER
- 110V NiMH charger

PROTECTION CLASS
- NEMA 4 / IP65

POWER CONSUMPTION
- 360 mA

BATTERY
- 12V, by 2 exchangeable battery modules 6V-4,8Ah

BATTERY CYCLE TIME
- 15 hours, charging time 6 hours

CHARGER
- 110V NiMH charger

CE TÜVRheinland CERTIFIED Management System ISO 9001:2015 ISO 14001:2015 ISO 45001:2018 www.tuv.com ID 0000037200

RAVAS creating intelligence

RAVAS USA

1500 Enterprise Parkway
Twinsburg, Ohio 44087

330.425.3092
www.ravas.com